



|       |                                          |          |                          |
|-------|------------------------------------------|----------|--------------------------|
| BIKE  | KAWASAKI Z1000                           | PART NO. | RKA-79                   |
| YEAR  | 2007 - 2009                              | FIT KITS | Z039.20435               |
| NOTES | Where not supplied use original fittings | FEATURES | DB KILLER Z038.10043 (V) |

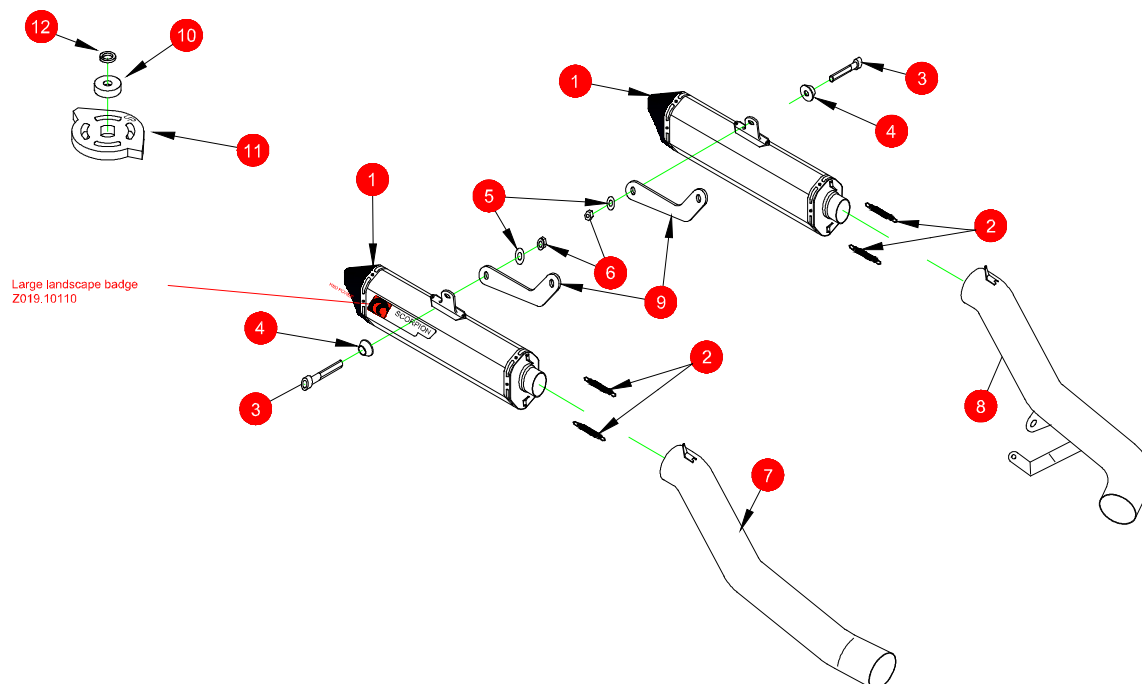

- 1 2 x 300MM Serket Silencers RSC198
- 2 4 x Red Power Springs (Z028.10030)
- 3 2 x M8 x 25mm Cap Head Bolts (Z017.10073)
- 4 2 x Aluminium Bolt Finishers (Z026.20068)
- 5 2 x M8 x 17mm Washers (Z017.10831)
- 6 2 x M8 Nyloc Nuts (Z017.10062)
- 7 Connecting Pipe CP655
- 8 Connecting Pipe CP654

- 9 2 x Mounting Brackets (Z015.20931)
- 10 Aluminium Collar (Z026.20045)
- 11 Replacement Servo Wheel (Z007.10955)
- 12 M6 Split Washer (Z017.10027)
- 13 Bump Stop kit (Z017.10010)

|             |                                                                  |
|-------------|------------------------------------------------------------------|
| E-MARK PIPE | <a href="#">KA-790</a> <a href="#">E4</a> 2326 <a href="#">S</a> |
| E-MARK      | <a href="#">KA-790</a> <a href="#">E4</a> 2326 <a href="#">S</a> |
| ISSUE NO.   | 6                                                                |
| DATE        | 10/12/11                                                         |
| AUTHORISED  | S.Pepper                                                         |
| CHECKED     |                                                                  |

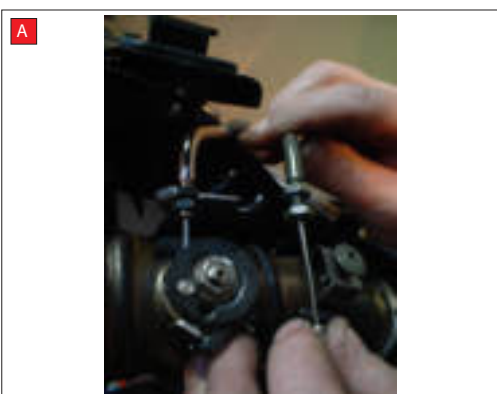

A) Disconnect cables on exhaust valve and leave loose..

B) To disconnect cables at the servo box end, you have to remove the hexagonal wheel, without turning it's shaft.  
Remove bolt in centre of hexagonal wheel using an 8mm socket. Support wheel if tight.

C) Remove hexagonal wheel from shaft, retaining OE bolt. DO NOT turn shaft.

Remove spring clip retaining cables and completely remove the cables



D) The replacement wheel comes with an aluminium collar & spring washer that is secured in place with OE bolt – TIGHTEN TO 5ft/lb USING A TORQUE WRENCH.

Box: PLOCK 2

|       |                                           |          |                          |
|-------|-------------------------------------------|----------|--------------------------|
| BIKE  | KAWASAKI Z1000                            | PART NO. | RKA-79                   |
| YEAR  | 2007 - 2009                               | FIT KITS | Z039.20435               |
| NOTES | Where not supplied use original fittings. | FEATURES | DB KILLER Z038.10043 (V) |

CONTINUED FROM OVERLEAF:



The replacement wheel must be fitted with the etched letters "UP"

E IS RIGHT!  
F IS WRONG!

Cleaning instrctions overleaf:

Box: PLOCK 2

|       |                |          |                          |
|-------|----------------|----------|--------------------------|
| BIKE  | KAWASAKI Z1000 | PART NO. | RKA-79                   |
| YEAR  | 2007 - 2009    | FIT KITS | Z039.20435               |
| NOTES |                | FEATURES | DB KILLER Z038.10043 (V) |

Thank you for purchasing your Scorpion Silencer.

Care of your exhaust: Please refrain from cleaning silencer with heavy solvents or abrasives!

Vielen Dank Für den kauf eines Scorpion Schalldampfers! Pflegehinweis: Bitte verwenden Sie niemals Scheuermittel oder aggressive Reiniger zur Pflege Ihres Auspuffes!

Merci d'avoir choisi un echappement Scorpion.

Entretien de votre silencieux: Ne pas utiliser de solvants ou de produits abrasifs!

"Muchas gracias por adquirir un Silencioso Scorpion. Le recomendamos no limpiar el silencioso con productos abrasivos o aquellos que contengan disolventes."