


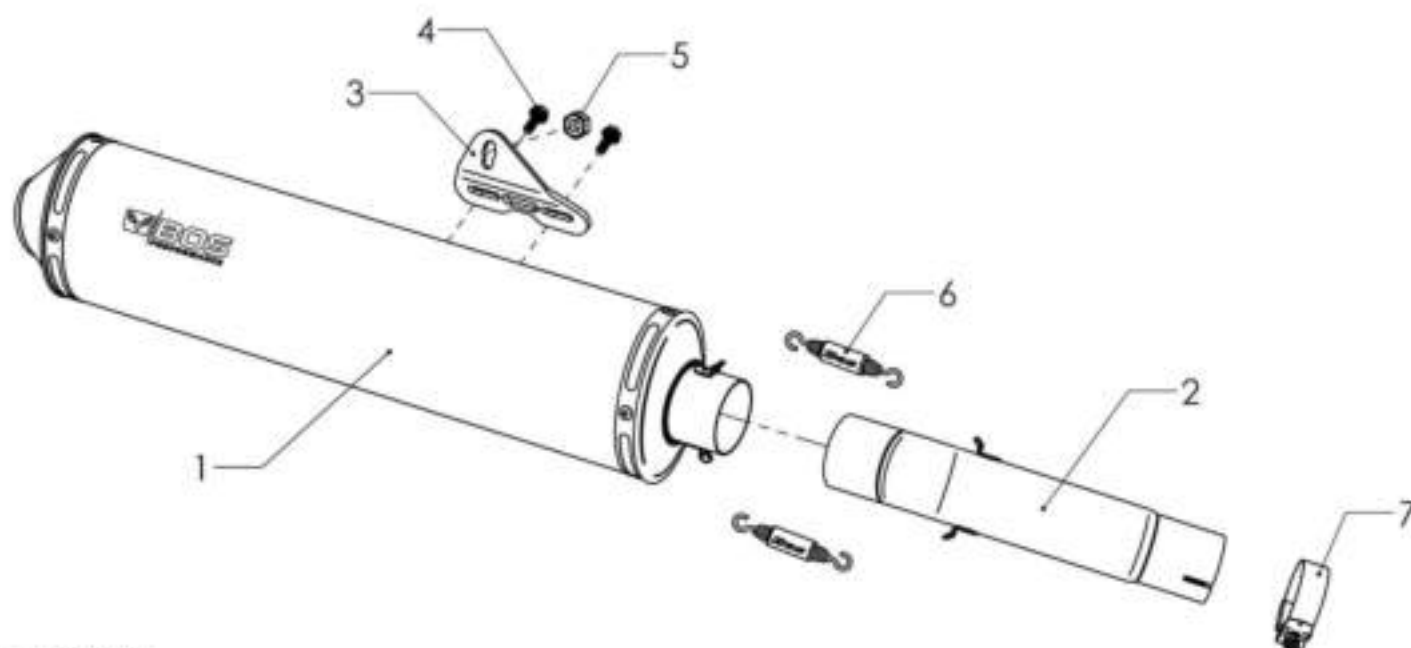

Approval Number

E 4 0105 TYPE 260

Pos	Qty	Part No.	Description	Ordernumber
1	1	900051	Muffler HyperFox Ov110 S150 Shot Blasted	YA06F01 - HFSB - Shot Blasted
1	1	900023	Muffler HyperFox Ov110 S150 Carbon Steel	YA06F01 - HFCS - Carbon Steel
1	1	900052	Muffler HyperFox Ov110 S150 Black Coated	YA06F01 - HFBC - Black Coated
		80095	Mounting Parts:	
2	1	72118	Link Pipe	
3	1	64417	Mounting Bracket	
4	2	14140	Bolt Flange M8x16	
5	1	14077	Nut M10x1,25	
6	2	14087	Pull Spring 48 mm.	
7	1	64014	Clamp 47	

Weight:

Stock: 5,4 kg

Bos: 4,2 kg

Noiselevel: @ 5750 rpm

Stock: Specified 90,0 dB(A)

Measured 90,0 dB(A)

Bos: EC appr. 90,6 dB(A)

Open 92,4 dB(A)

Performance

Stock: 81,0 Hp / 11833 rpm

Bos: 82,2 Hp / 10853 rpm

Max. Hp incr.: + 7,9 Hp / 6435 rpm

Max Nm incr.: + 9,6 Nm / 5676 rpm

Extra Parts:

50035 DBeater Ø 28 Hyper

Tips

In order to avoid smudges and fingerprints burning into the surface it is imperative to clean the exhaust before starting the engine, burnt in stains are very difficult to remove.

After 300 miles or 500 kms. check all nuts and bolts and retighten if necessary.