


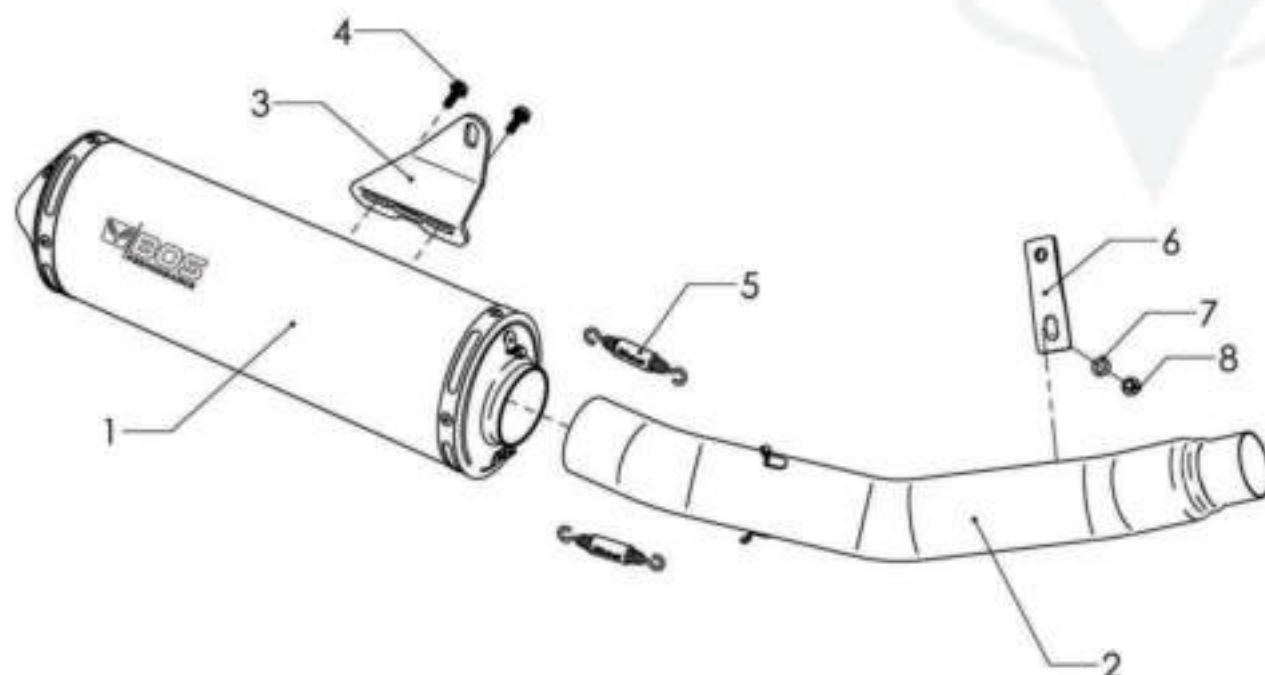

| Pos | Qty | Part No. | Description                       | Ordernumber              |
|-----|-----|----------|-----------------------------------|--------------------------|
| 1   | 1   | 900024   | Muffler BOS Oval 120 Stainless    | 1311608S - Stainless     |
| 1   | 1   | 900025   | Muffler BOS Oval 120 Carbon Steel | 1311608Cs - Carbon Steel |
| 2   | 1   | 80258    | <b>Mounting Parts:</b>            |                          |
|     |     | 73160    | Link Pipe                         |                          |
| 3   | 1   | 64747    | Mounting Bracket                  |                          |
| 4   | 2   | 14140    | Bolt M6x16                        |                          |
| 5   | 2   | 14087    | Pull Spring 48 mm.                |                          |
| 6   | 1   | 64748    | Mounting Bracket LP               |                          |
| 7   | 1   | 14058    | M8 Spring Washer                  |                          |
| 8   | 1   | 14063    | Bolt M8x12                        |                          |

|                |        |  |  |  |
|----------------|--------|--|--|--|
| <b>Weight:</b> |        |  |  |  |
| Stock:         | 7,5 kg |  |  |  |
| Bos:           | 4,4 kg |  |  |  |

|                               |              |            |  |  |
|-------------------------------|--------------|------------|--|--|
| <b>Noiselevel: @ 5100 rpm</b> |              |            |  |  |
| Stock:                        | Specified    | 91,0 dB(A) |  |  |
|                               | Measured     | 89,0 dB(A) |  |  |
| Bos:                          | With DBeater | 90,7 dB(A) |  |  |
|                               | Open         | 99,7 dB(A) |  |  |

|                    |                      |  |  |  |
|--------------------|----------------------|--|--|--|
| <b>Performance</b> |                      |  |  |  |
| Stock:             | 103,0 Hp / 10383 rpm |  |  |  |
| Bos:               | 105,6 Hp / 10548 rpm |  |  |  |
| Max. Hp incr.:     | + 3,2 Hp / 8766 rpm  |  |  |  |
| Max Nm incr.:      | + 3,7 Nm / 4600 rpm  |  |  |  |

|                     |                   |  |  |  |
|---------------------|-------------------|--|--|--|
| <b>Extra Parts:</b> |                   |  |  |  |
| 50119               | Dbeater Ø32 Hyper |  |  |  |

**Tips**

In order to avoid smudges and fingerprints burning into the surface it is imperative to clean the exhaust before starting the engine, burnt in stains are very difficult to remove.  
After 300 miles or 500 kms. check all nuts and bolts and retighten if necessary.